

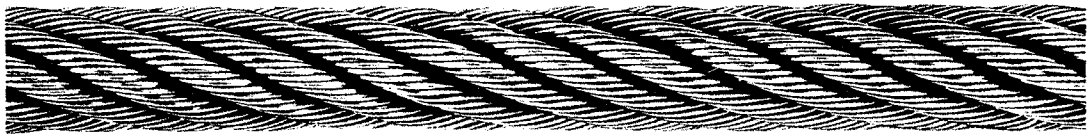



Elevator Wire Ropes
Traction Steel
8 x 19 Class





8 x 19 Seale 8 Strands, 19 Wires per Strand



8 x 25 filler wire Type W 8 Strands, 25 Wires per Strand, 1/2 in. and larger



8 x 21 filler wire Type U 8 Strands, 21 Wires per Strand, 1/2 in. and larger

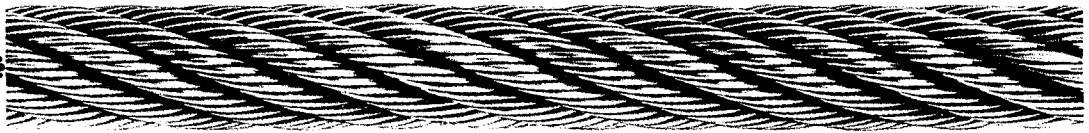

8 x 19 Warrington 8 Strands, 19 Wires per Strand, 7/16 in. and smaller

Regular Lay — Fiber Core

Diam.* in.	Weight per ft., approx. lb.	Breaking Strength lb.
1/4	.09	3,600
5/16	.14	5,600
3/8	.20	8,200
7/16	.28	11,000
1/2	.36	14,500
9/16	.46	18,500
5/8	.57	23,000
11/16	.69	27,000
3/4	.82	32,000
13/16	.96	37,000
7/8	1.11	42,000
15/16	1.27	48,000
1	1.45	54,000
1 1/16	1.64	61,000
1 1/8	1.84	69,000
1 1/4	2.27	85,000

Let us help with those hard to find items !

