


Shackles

Size (A)	Work Load Limit in Tons	Pin Diameter in Inches (B)	Approx. Weight Each in Pounds	Anchor Shackle Screw Pin/ Galvanized			
				C	D	E	F
3/16"	1/3	1/4	.05	.88	.38	.56	.63
1/4"	1/2	5/16	.13	1.06	.47	.66	.75
5/16"	3/4	3/8	.21	1.25	.53	.81	.84
3/8"	1	7/16	.33	1.44	.63	.97	1.00
7/16"	1.1/2	1/2	.47	1.69	.75	1.06	1.13
1/2"	2	5/8	.76	1.88	.81	1.31	1.25
5/8"	3.1/4	3/4	1.44	2.44	1.06	1.56	1.69
3/4"	4.3/4	7/8	2.3	2.88	1.19	1.88	1.94
7/8"	6.1/2	1	3.5	3.38	1.44	2.13	2.19
1"	8.1/2	1.1/8	5.0	3.81	1.69	2.38	2.63
1.1/8"	9.1/2	1.1/4	7.0	4.25	1.75	2.63	2.88
1.1/4"	12	1.3/8	9.5	4.69	2.00	3.00	3.13
1.3/8"	13.1/2	1.1/2	13.0	5.31	2.13	3.25	3.50
1.1/2"	17	1.5/8	16.5	5.69	2.31	3.50	3.75
1.3/4"	25	2	29.0	7.06	2.88	4.25	4.88
2"	35	2.1/4	43.0	7.75	3.31	4.88	5.44
2.1/4"	45	2.1/2	59.4	9.25	3.63	5.25	5.50
2.1/2"	55	2.3/4	86.0	10.75	4.13	5.88	7.25
3"	85	3.1/4	119.5	13.75	4.88	6.75	7.63

Anchor Shackles Screw Pin


Galvanized, Available in Commercial Grade

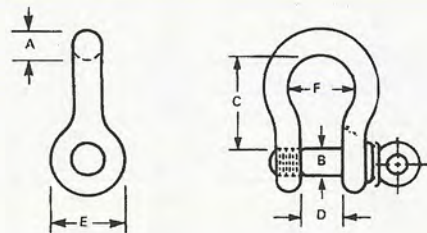

Size (A)	Work Load Limit in Tons	Pin Diameter in Inches (B)	Approx. Weight Each in Pounds	Anchor Shackle Screw Pin/ Galvanized			
				C	D	E	F
3/4"	7	7/8	2.8	3.00	1.28	1.88	1.97
7/8"	9	1	4.2	3.38	1.44	2.13	2.28
1"	12	1.1/8	6.4	3.94	1.72	2.38	2.69
1.1/4"	18	1.3/8	11.7	4.81	2.06	2.91	3.25
1.1/2"	30	1.5/8	19.7	6.00	2.31	3.63	3.75
1.3/4"	40	2	32.6	7.50	2.88	4.13	5.00
2"	50	2.1/4	48.3	8.25	3.38	4.81	6.25
2.1/2"	80	2.3/4	94.0	11.0	4.25	5.84	7.63
3"	120	3.1/4	145.0	13.75	5.13	6.75	9.00
3.1/2"	150	3.3/4	250.0	14.75	5.75	8.25	9.50
4"	175	4.1/4	358.0	17.50	6.75	9.50	11.88
4.1/4"	200	4.3/4	460.0	21.31	7.00	9.97	12.75
4.3/4"	250	5.1/8	640.0	22.50	7.88	10.50	14.13
5.1/8"	300	5.3/4	810.0	22.50	8.25	11.00	15.75
6.1/8"	500	6.3/4	1,380.0	30.50	9.88	14.00	19.63
8"	750	8.1/2	3,070.0	32.50	13.38	17.00	23.00
9.1/2"	1,000	10	5,150.0	39.00	15.50	20.00	29.13

Anchor Shackles Bolt Type

Alloy Steel, Available as Chain Shackles

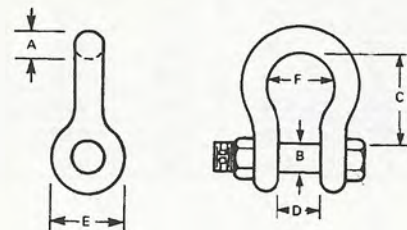

Size (A)	Work Load Limit in Tons	Bolt Diameter in Inches (B)	Mouth Opening (D)	Approx. Weight Each in Pounds	Towing Shackles / Alloy		
					C	E	F
1.1/2"	22	1.7/8	4.19	27.5	8.50	3.75	6.25
1.3/4"	30	2	5.00	40	9.75	4.38	6.88
2"	40	2.1/4	5.75	56	10.75	5.00	8.13
2.1/2"	55	2.3/4	6.50	106	12.38	6.00	8.38
3"	80	3.1/4	7.25	157	13.00	6.75	10.00

Towing Shackles

Alloy Steel

