


SH ELECTRIC CHAIN HOIST

CAPACITIES 1/4 TO 2 TONS VOLTAGES 110 OR 220-1-60 SH SINGLE PHASE

HOOK SUSPENSION

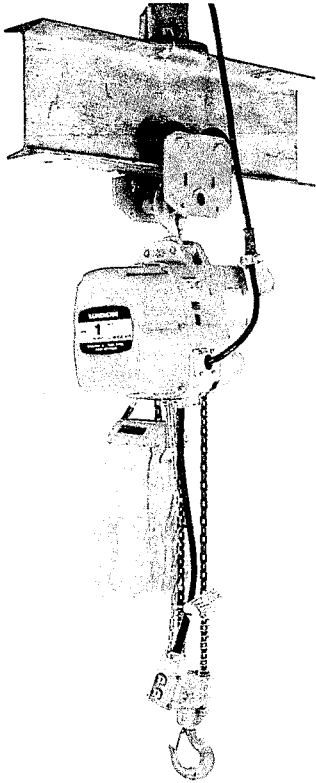


Cap. (tons)	Code	Std. Lift (ft)	Max. Lift with Std. Chain Container (ft)	Push Button Cord: L (ft)	Motor		Rated Current @ 110V (amps)	Rated Current @ 220V (amps)	Lift Speed (FPM)	Load Chain Falls	Minimum Hdrm: C (in)	Net Weight (lbs)
					HP	Duty Rating (min.)						
1/4	SH003S	10	40	6	1/3	12	6.8	3.6	15	1	20	70
1/2	SH005L		20		1/3	12			7.5	2	21.6	79
1/2	SH005S		50		1/2	12	4.2	1	27.4	99		
1	SH010L		25		1/2	12					7	2
1	SH010S		50		3/4	12	12.1	5.2	1	28.7	132	
2	SH020L		25		3/4	12						9

NOTE: The above specifications also apply to SHP and SHG hoists.

PLAIN SHP OR GEARED (SHG) TROLLEY

Cap. (tons)	Code	Standard Handchain Length: N (ft)	Minimum Headroom: C (in)	Standard Flange Width (in)	Minimum Curve Radius (in)	Net Weight (lbs)
1/4	SHP (SHG) 003	(10.5)	21.65 (21.85)	2.28 to 4.92	32 (39)	84 (104)
1/2	SHP (SHG) 005L		23.22 (23.42)			93 (112)
1/2	SHP (SHG) 005S		29 (29.2)			112 (132)
1	SHP (SHG) 010L	(11)	32.5		39	134 (143)
1	SHP (SHG) 010S		30.6			156 (165)
2	SHP (SHG) 020L	(12)	43.7		3.94 to 5.91	47

NOTE: Figures in parentheses are the SHG Hoists.

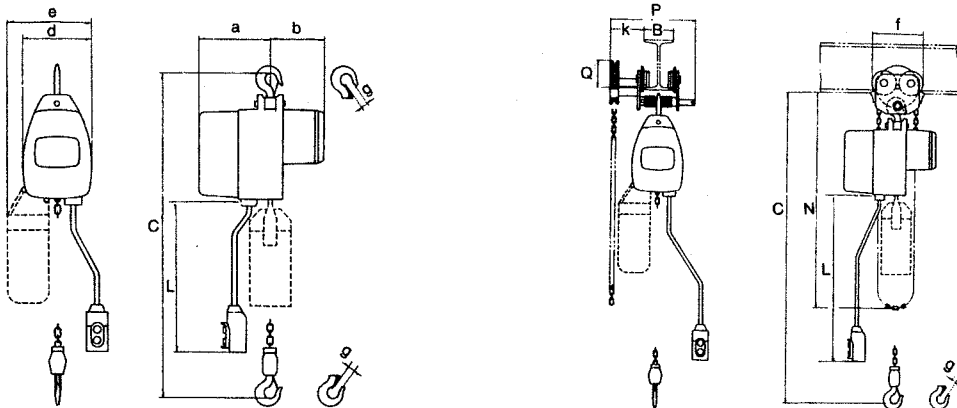

DIMENSIONS (in)

Capacity	a	b	d	e	f		g	k		p		Q	
					SHP	SHG		SHG	SHP	SHP	SHG	SHP	SHG
1/4	8.9	5.8	6.8	10.9	6.4		1.1					2.5	
1/2 L	8.9	5.8	6.8	10.9	6.4		1.1					2.5	
1/2 S	8.8	6.6	8.6	15.1	6.4	8.7	1.1	5.75	1.06	9.2	14.25	2.5	4.4
1 L	8.8	6.6	8.6	15.1	8.7		1.2					1.18	
1 S	9.9	7.3	9.2	16.2	8.7		1.2		1.18	9.7		3.5	
2 L	9.9	7.3	9.9	16.9	10.4	10.4	1.2	5.8	1.18	11.22	15.7	4.2	4.7