


Links and Rings

WELDLESS END LINKS




- Self Colored or Hot Dip galvanized.
 - Forged carbon steel — Quenched and Tempered.
- S-340, from 5/16" thru 7/8" meet the requirements of Federal Specification RR-C-271D, Type XV.

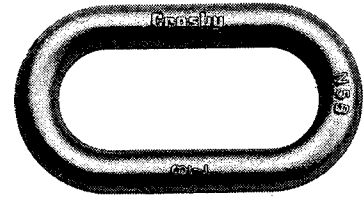

G-340 & S-340

Size (A) (in.)	Stock No.		Working Load Limit * (lbs.)	Weight Each (lbs.)	Dimensions (in.)		
	G-340 Galv.	S-340 S.C.			B	C	D
5/16	1014057	1014066	2500	.15	.50	1.75	1.18
3/8	1014075	1014084	3800	.23	.56	1.88	1.38
1/2	1014093	1014100	6500	.45	.75	2.38	1.81
5/8	1014119	1014128	9300	.95	1.00	3.25	2.32
3/4	1014137	1014146	14000	1.51	1.13	3.50	2.68
7/8	1014155	1014164	12000	2.75	2.00	5.13	3.75
1	1014173	1014182	15200	3.95	2.25	5.75	4.25
1 1/4	1014191	1014208	26400	7.30	2.50	7.00	5.00
1 3/8	1014217	1014226	30000	10.38	2.75	7.75	5.50

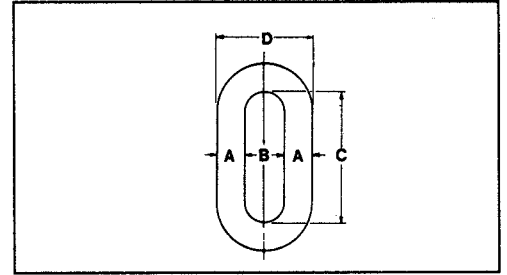

* Ultimate Load is 5 times the Working Load Limit.

WELDLESS SLING LINKS




- Self Colored or Hot Dip galvanized.
- Forged carbon steel — Quenched and Tempered.



G-341 & S-341

Size (A) (in.)	Stock No.		Working Load Limit * Single Pull (lbs.)	Weight Each (lbs.)	Dimensions (in.)				
	G-341 Galv.	S-341 S.C.			B	C	D	E	F
3/8	1013897	1013904	1800	.13	1.13	.75	3.00	2.25	.38
1/2	1013913	1013922	2900	.55	1.50	1.00	4.00	3.00	.50
5/8	1013931	1013940	4200	1.10	1.87	1.25	5.00	3.75	.63
3/4	1013959	1013968	6000	1.95	2.25	1.50	6.00	4.50	.75
7/8	1013977	1013986	8300	2.78	2.63	1.75	7.00	5.25	.88
1	1013995	1014002	10800	4.30	3.00	2.00	8.00	6.00	1.00
1 1/4	1014011	1014020	16750	8.50	4.00	2.50	10.25	7.50	1.25
1 3/8	1014039	1014048	20500	11.50	4.13	2.75	11.00	8.25	1.38

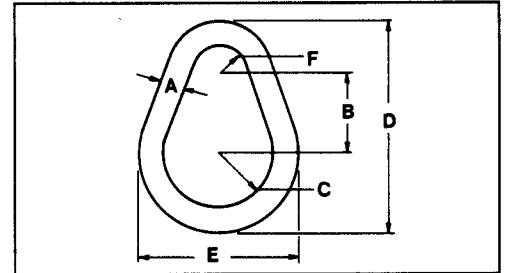


* Ultimate Load is 6 times the Working Load Limit.

WELDLESS RINGS




- Self Colored.
- Forged carbon steel — Quenched and Tempered.

Weldless Rings meet the requirements of Federal Specification RR-C271D Type VI.



S-643

Size (A) (in.)	S-643 Stock No. S.C.	Working Load Limit * Single Pull (lbs.)	Weight Each (lbs.)	Dimensions (in.)	
				B	C
7/8 x 4	1013780	7200	2.70	4.00	5.75
7/8 x 5 1/2	1013806	5600	3.40	5.50	7.25
1 x 4	1013824	10800	3.50	4.00	6.00
1 1/8 x 6	1013842	10400	6.50	6.00	8.25
1 1/4 x 5	1013860	17000	7.00	5.00	7.50
1 3/8 x 6	1013888	19000	10.63	6.00	8.75

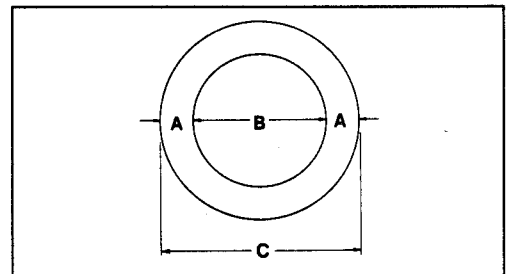

* Ultimate Load is 6 times the Working Load Limit.