

Dimensions in inches
Weights in pounds

MALLEABLE BEVEL WASHERS




Diamond "D" Brand bevel washers are used when bolting to the flanges of I beams and channels. All sizes have a standard slope of 16 2/3 percent or 2 inches in 12 inches, which is the same taper as standard I beam flanges. They are marked with the size of bolt for which they are intended.

| Stock No. | Dia. Bolt in Inches | Approx. Wt. Per 100 Pcs. |
|-----------|---------------------|--------------------------|
| 70005 | 1/4 | 1.6 |
| 70010 | 5/16 | 6.0 |
| 70015 | 3/8 | 9.5 |
| 70020 | 1/2 | 10.2 |
| 70025 | 5/8 | 15.4 |
| 70030 | 3/4 | 16.4 |
| 70035 | 7/8 | 34.2 |
| 70040 | 1 | 32.5 |
| 70045 | 1 1/8 | 50.0 |
| 70050 | 1 1/4 | 75.0 |

STAINLESS STEEL EYEBOLTS PLAIN PATTERN


• 304 Stainless Steel



| Stock No. | (A) Thread Size UNC-2A | (B) Shank Length | (C) I.D. Eye | Approx. Wt. Per 100 Pcs. | Rated Capacity |
|-----------|------------------------|------------------|--------------|--------------------------|----------------|
| SS13631 | 3/8-16 | 1 1/4 | 1 | 14.0 | 1,160 |
| SS13641 | 1/2-13 | 1 1/2 | 1 3/16 | 29.5 | 2,150 |
| SS13661 | 5/8-11 | 1 3/4 | 1 3/4 | 58.0 | 3,440 |
| SS13672 | 3/4-10 | 2 | 1 1/2 | 88.5 | 5,140 |


STAINLESS STEEL EYEBOLTS SHOULDER PATTERN

• 304 Stainless Steel



| Stock No. | (A) Thread Size UNC-2A | (B) Shank Length | (C) I.D. Eye | Approx. Wt. Per 100 Pcs. | Rated Capacity |
|-----------|------------------------|------------------|--------------|--------------------------|----------------|
| SS14611 | 1/4-20 | 1 | 3/4 | 5.0 | 460 |
| SS14621 | 5/16-18 | 1 1/8 | 7/8 | 9.6 | 780 |
| SS14631 | 3/8-16 | 1 1/4 | 1 | 16.0 | 1,160 |
| SS14641 | 1/2-13 | 1 1/2 | 1 3/16 | 34.8 | 2,150 |
| SS14661 | 5/8-11 | 1 3/4 | 1 3/8 | 67.0 | 3,440 |
| SS14672 | 3/4-10 | 2 | 1 1/2 | 100.0 | 5,140 |

SET-UP WEDGES

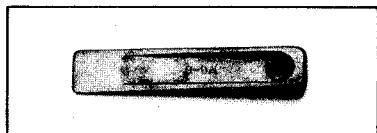

Set-up wedges are designed for adjusting or leveling work on planers, shapers, milling machines, etc. They are forged from carbon steel for extra strength and reliability.

| Stock No. | Length Inches | Width Inches | Max. Thickness | Approx. Wt. Per 100 Pcs. |
|-----------|---------------|--------------|----------------|--------------------------|
| 16910 | 3 | 1 | 1/4 | 20.0 |
| 16911 | 5 | 1 | 1/2 | 37.5 |
| 16912 | 6 | 1 1/4 | 3/4 | 55.0 |