


ADJUST-A-MATIC

TENSIONERS & CHAIN ASSEMBLIES

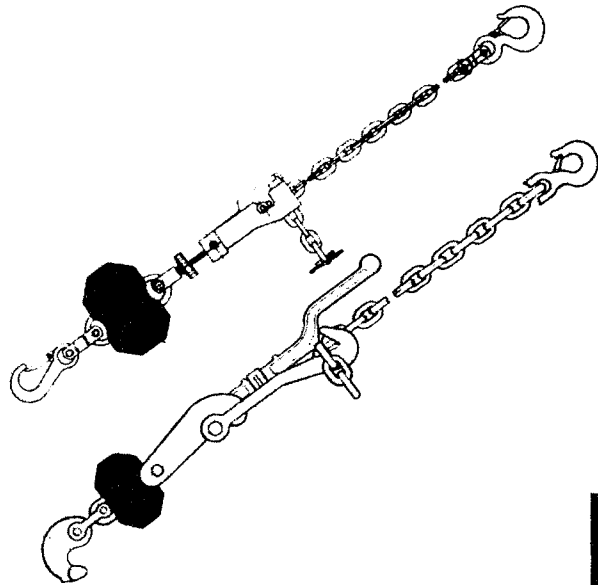

SPECIFICATIONS

STRENGTH:

| MODEL NO. | M.B.S. |
|-----------|--------|
| 7MTC | 3.2 T |
| 15MTC | 6.8 T |
| 35MTC | 15.9 T |
| 70MTC | 32.0 T |

STRENGTH IS SHOWN IN TONNES = 2204 LBS

MATERIAL: TENSIONER: ALLOY STEEL
CHAIN: ALLOY STEEL
SHOCK MITIGATOR: RUBBER

FINISH: 7MTC: CAD CHROME PLATE
15MTC: CAD CHROME PLATE
35MTC: HOT DIP GALVANIZED
70MTC: HOT DIP GALVANIZED


HOW TO ORDER:

1. SELECT PROPER STRENGTH
2. CHOOSE DESIRED END FITTINGS NEEDED FOR APPLICATION
3. DETERMINE MIN. AND MAX. LENGTHS NEEDED

FEATURES


- USED FOR LIGHTWEIGHT AND HEAVY DUTY TIEDOWN OF VEHICLES EQUIPMENT AND CARGO
- EASE OF MAINTENANCE AND USE
- RANGE OF ADJUSTMENT FROM 2 FT TO 16 FT
- SHOCK MITIGATING DEVICES AVAILABLE

TENSIONER ASSEMBLY (35MTC SHOWN WITH BULB HOOK)

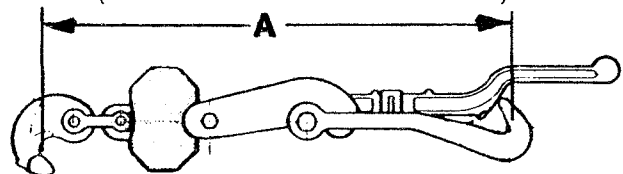

| MODEL NO. | A | USED WITH CHAIN SIZE |
|-----------|-------|----------------------|
| 7MTC | 457.0 | 6.0 |
| 15MTC | 584.0 | 7.0 |
| 35MTC | 635.0 | 13.0 |
| 70MTC | 838.0 | 16.0 |

CHAIN ASSEMBLY

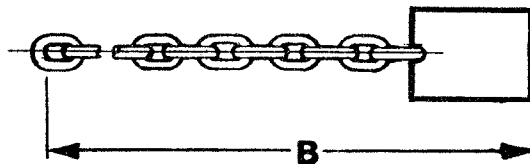

B DIMENSION IS DETERMINED TO THE SPECIFIC APPLICATION

| MODEL NO. | CHAIN SIZE |
|-----------|------------|
| 7MTC | 6.0 |
| 15MTC | 7.0 |
| 35MTC | 13.0 |
| 70MTC | 16.0 |