


Cotterless Hitch Pins

A	C	B	CARBON STEEL PRODUCT CODE	STAINLESS STEEL PRODUCT CODE	WEIGHT PER 100
DIAMETER	EFFECTIVE LENGTH RING TO BALL	LENGTH FROM RING TO END OF PIN			
5/16"	5-1/8"	5-1/2"	30-24	30-SS24	12.44
3/8"	5/8"	1"	30-25	30-SS25	4.00
3/8"	3/4"	1-1/8"	30-25-1		4.40
3/8"	1"	1-3/8"	30-25-2	30-SS25-2	5.20
3/8"	1-1/8"	1-1/2"	30-26	30-SS26	5.60
3/8"	1-1/2"	1-7/8"	30-26-1	30-SS26-1	6.80
3/8"	1-5/8"	2"	30-27	30-SS27	7.20
3/8"	1-3/4"	2-1/8"	30-27-1		7.55
3/8"	2"	2-3/8"	30-27-2		8.00
3/8"	2-1/8"	2-1/2"	30-28	30-SS28	8.60
3/8"	2-1/2"	2-7/8"	30-28-1	30-SS28-1	9.80
3/8"	2-5/8"	3"	30-29	30-SS29	10.20
3/8"	3"	3-3/8"	30-29-1	30-SS29-1	11.40
3/8"	3-1/8"	3-1/2"	30-30	30-SS30	11.80
3/8"	3-1/2"	3-7/8"	30-30-1		12.85
3/8"	3-5/8"	4"	30-31	30-SS31	13.20
3/8"	4-1/8"	4-1/2"	30-32	30-SS32	14.80
3/8"	4-5/8"	5"	30-33	30-SS33	16.40
3/8"	5-1/8"	5-1/2"	30-34	30-SS34	18.00
7/16"	9/16"	1"	30-35	30-SS35	5.40
7/16"	1"	1-7/16"	30-35-1		7.15

A	C	B	CARBON STEEL PRODUCT CODE	STAINLESS STEEL PRODUCT CODE	WEIGHT PER 100
DIAMETER	EFFECTIVE LENGTH RING TO BALL	LENGTH FROM RING TO END OF PIN			
7/16"	1-1/16"	1-1/2"	30-36	30-SS36	7.40
7/16"	1-9/16"	2"	30-37	30-SS37	9.40
7/16"	2"	2-7/16"	30-37-1		11.32
7/16"	2-1/16"	2-1/2"	30-38	30-SS38	11.60
7/16"	2-1/2"	2-15/16"	30-38-1		13.35
7/16"	2-9/16"	3"	30-39	30-SS39	13.60
7/16"	3-1/16"	3-1/2"	30-40	30-SS40	15.80
7/16"	3-9/16"	4"	30-41	30-SS41	17.80
7/16"	4-1/16"	4-1/2"	30-42	30-SS42	20.50
7/16"	4-9/16"	5"	30-43	30-SS43	22.20
7/16"	5-1/16"	5-1/2"	30-44	30-SS44	24.20
1/2"	1/2"	1"	30-45	30-SS45	6.80
1/2"	1"	1-1/2"	30-46	30-SS46	9.50
1/2"	1-1/2"	2"	30-47	30-SS47	12.20
1/2"	2"	2-1/2"	30-48	30-SS48	15.00
1/2"	2-1/2"	3"	30-49	30-SS49	17.50
1/2"	3"	3-1/2"	30-50	30-SS50	20.60
1/2"	3-1/2"	4"	30-51	30-SS51	23.50
1/2"	4"	4-1/2"	30-52	30-SS52	26.00
1/2"	4-1/2"	5"	30-53	30-SS53	28.20
1/2"	5"	5-1/2"	30-54	30-SS54	31.60

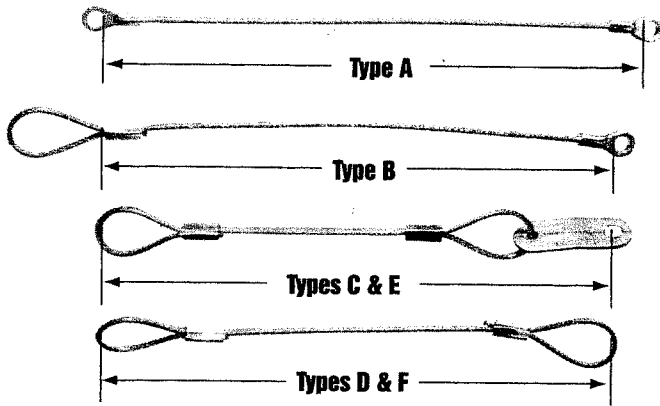

Lanyards can help prevent the loss of many of the fasteners offered in this catalog and should be used for retaining purposes only. Types A, B, C and D are available in either 3/64" galvanized steel or Type 304 stainless steel and nylon-coated to a 1/16" outside diameter. Types E and F are 1/16" galvanized steel, nylon coated to a 3/32" outside diameter.

Terminals (Types A & B) are of zinc plated copper with a #10 hole for the galvanized cable and 304 stainless steel with a .190 hole for the stainless steel lanyards.

Sleeves (Types B, C, D, E and F) are made of aluminum and are 3/8" long.

Tabs (Types C & E) are made of type 304 stainless steel and are 1-1/4" long overall with a .203 diameter hole for fastening.

TYPE	LENGTH	WIRE DIAM.	CODE (GALVANIZED)	CODE (STAINLESS)	WEIGHT PER 100
A (2 Terminals)	6"	3/64"	79-01	79002	0.54
	8"	3/64"	79-30	79003	0.62
	10"	3/64"	79-31	79004	0.71
	12"	3/64"	79-02	79005	0.79
	18"	3/64"	79-03	79006	1.11
B (Terminal & Loop)	24"	3/64"	79-32	79007	1.36
	6"	3/64"	79-04	79009	0.65
	8"	3/64"	79-35	79010	0.73
	10"	3/64"	79-36	79011	0.82
	12"	3/64"	79-05	79012	0.89
E (2 Loops & Tab)	18"	3/64"	79-06	79013	1.16
	24"	3/64"	79-37	79014	1.41
	6"	1/16"	79-07		2.50
	8"	1/16"	79-40		2.67
	10"	1/16"	79-41		2.84
D (2 Loops)	12"	1/16"	79-08		3.00
	18"	1/16"	79-09		3.50
	24"	1/16"	79-42		4.00
	6"	3/64"	79-11	79016	0.58
	8"	3/64"	79-21	79017	0.66
C (2 Loops & Tab)	10"	3/64"	79-22	79018	0.75
	12"	3/64"	79-12	79019	0.82
	18"	3/64"	79-13	79020	1.08
	24"	3/64"	79-23	79021	1.33
	F (2 Loops)	6"	3/64"	79-15	79023
8"		3/64"	79-19	79024	1.69
10"		3/64"	79-20	79025	1.76
12"		3/64"	79-16	79026	1.80
18"		3/64"	79-17	79027	2.04
F (2 Loops)	24"	3/64"	79-18	79028	2.29
	6"	1/16"	79-24		1.46
	8"	1/16"	79-45		1.63
	10"	1/16"	79-46		1.80
	12"	1/16"	79-27		1.96
F (2 Loops)	18"	1/16"	79-28		2.46
	24"	1/16"	79-47		2.96

