
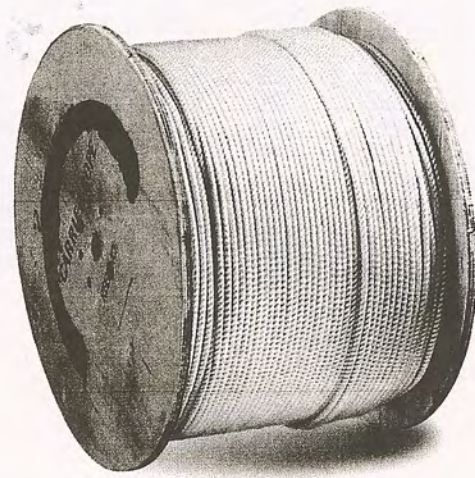


# Paper Machine Threading Ropes

## PI THREE STRAND CARRIER ROPE

- PI method of interstranding to assure even tension in individual strands.
- Superior tail carrying and threading properties.
- High temperature materials available for IR applications.
- Round cross section is maintained under load.
- Easily spliced using the Kenyon "Rolling Splice".
- Prestretched and heat set, for maximum stability.

Various color combinations for inside/outside rope identification.

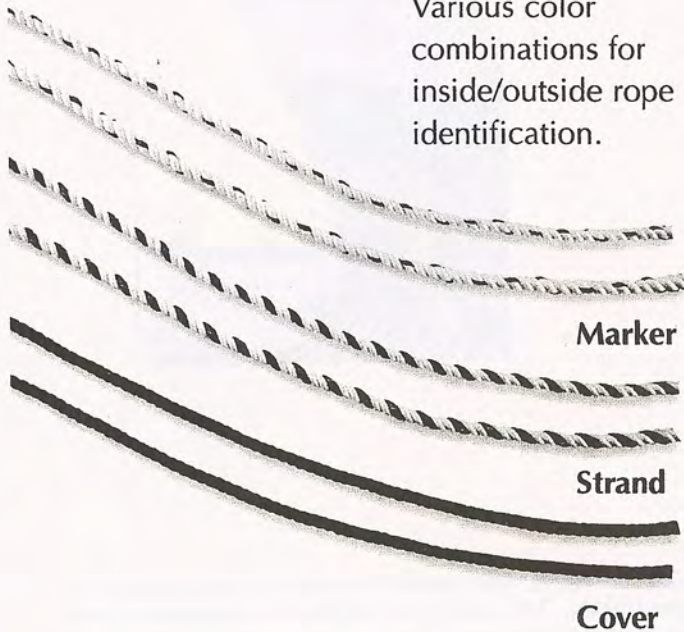

### PI Spun - 100% Spun Nylon

An industry standard worldwide. The only true carrier rope that has been specifically engineered for paper machine threading systems, offering a balance of durability and performance with ease of use.

## PI THREE STRAND CARRIER ROPE

STYLE	DIAMETER INCHES	DIAMETER MILLIMETERS	APPROX. BREAK STRENGTH		STANDARD STOCK LENGTH	
			LBS.	KGF.	FEET	METERS
PI SPUN	5/16"	8mm	2,700	1,225	5,000	1,524
	3/8"	10mm	3,400	1,542	5,000	1,524
	7/16"	11mm	3,900	1,769	5,000	1,524
	1/2"	12mm	5,600	2,540	5,000	1,524
	9/16"	14mm	7,200	3,266	5,000	1,524
	5/8"	16mm	8,700	3,946	5,000	1,524