


LADDERS

TAPER SINGLE

**Exceeds
OSHA & ANSI**

TYPE I
HEAVY DUTY INDUSTRIAL
250 lb. DUTY RATING

Model	Size	Shipping Weight
TPG-8	8 ft.	15 lbs.
TPG-10	10 ft.	19 lbs.
TPG-12	12 ft.	24 lbs.
TPG-14	14 ft.	25 lbs.
TPG-16	16 ft.	27 lbs.
TPG-18	18 ft.	33 lbs.
TPG-20	20 ft.	40 lbs.
TPG-22	22 ft.	45 lbs.
TPG-24	24 ft.	51 lbs.

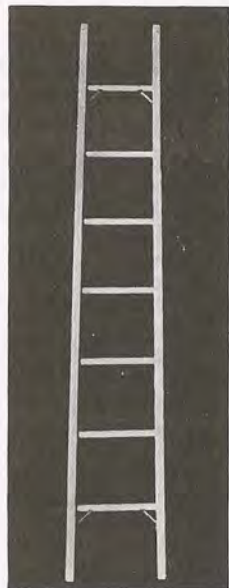

Side Rails:

8 ft. thru 16 ft. 1 3/8" x 2 3/4"

18 ft. thru 24 ft. 1 3/8" x 3"

Hickory rungs: 1 5/32" dia.

Rung ends are dipped in 5% Penta solution.

All rail ends are tie riveted.

Side rails are 'blind bored' to protect rung tenons.

Two pairs of steel rung braces are riveted to each ladder.

Outside width at top is 14" and spreads 1/4" to the foot.

Suggest shoes be attached.

The TAPER Single offers the same construction characteristics as found in the Babcock EASTERN Extension ladder. The two pairs of steel rung braces add sturdiness and durability. The TAPER'S well-built and lighter weight design make this the ideal single ladder for general all-around use.

MECHANIC SINGLE

**Exceeds
OSHA & ANSI**

TYPE IA
EXTRA HEAVY DUTY INDUSTRIAL
300 lb. DUTY RATING

Model	Size	Shipping Weight
MCG-8	8 ft.	22 lbs.
MCG-10	10 ft.	23 lbs.
MCG-12	12 ft.	25 lbs.
MCG-14	14 ft.	30 lbs.
MCG-16	16 ft.	34 lbs.
MCG-18	18 ft.	47 lbs.
MCG-20	20 ft.	52 lbs.
MCG-22	22 ft.	54 lbs.
MCG-24	24 ft.	58 lbs.

Side Rails:

8 ft. thru 16 ft. 1 3/8" x 3"

18 ft. thru 24 ft. 1 3/8" x 3 1/16"

Hickory rungs: 1 1/4" dia.

Rung ends are dipped in 5% Penta solution.

All rail ends are tie riveted.


Side rails are 'blind bored' to protect rung tenons.

Two pairs of steel rung braces are riveted to each ladder.

Side rails are tapered with outside width at top 14" and spreads 1/4" to the foot.

Suggest shoes be attached.

The MECHANIC Single ladder compliments the rugged, extra heavy duty CHAMPION extension ladder. Designed for maximum strength for the safety-conscious worker.

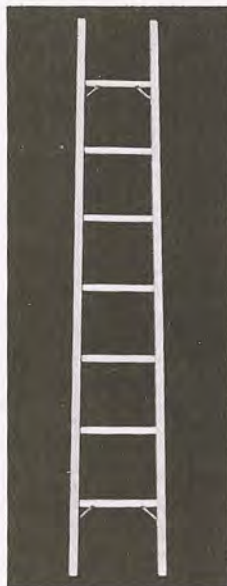

Side Rails:

10 ft. thru 22 ft. 1 3/4" x 3 3/4"

Hickory rungs: 1 3/8" dia.

Rung ends are dipped in 5% Penta solution.

All rail ends are tie riveted.

Side rails are 'blind bored' to protect rung tenons.

Two pairs of steel rung braces are riveted to each ladder.

Side rails are parallel with outside width of 20".

Suggest shoes be attached.

The MASON Single ladder is a special purpose ladder designed for extra heavy duty construction work. The extremely large side rail and rung dimensions will satisfy the most demanding requirements for wood single ladders.

MASON SINGLE

**Exceeds
OSHA & ANSI**

TYPE IA
EXTRA HEAVY DUTY INDUSTRIAL
300 lb. DUTY RATING

Model	Size	Shipping Weight
MSG-10	10 ft.	33 lbs.
MSG-12	12 ft.	40 lbs.
MSG-14	14 ft.	44 lbs.
MSG-16	16 ft.	48 lbs.
MSG-18	18 ft.	52 lbs.
MSG-20	20 ft.	56 lbs.
MSG-22	22 ft.	59 lbs.

