


Gold Standard® Chain Shackles




**No. 321
Safety Pin
Shackle**

Available 1"-4½"

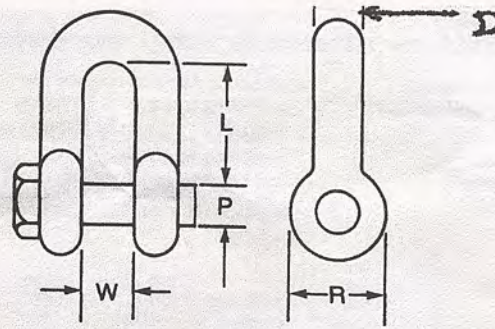


**No. 270
Screwpin Shackle
Eyed Pin**

Available 1"-2"

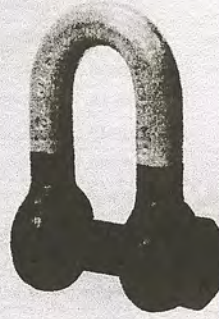

**No. 271
Screwpin Shackle
Hex Head Pin**

Available 1"-2"

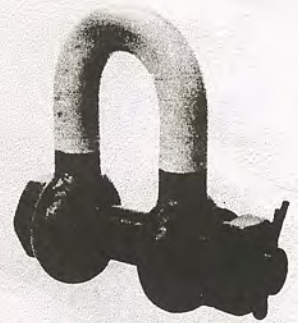

**No. 325
Towing Shackle
Double Nut and
Locking Bolts**


Size	SWL ¹ (Tons)	D	W	Tol. ±	L	Tol. ±	R	P	WT. ² (lbs)
1"	16	1"	1¼"	- 1/16" + 1/16"	3¼"	± 1/4"	2¼"	1½"	5.5
1½"	17.5	1½"	1¼"	- 1/16" + 1/16"	3½"	± 1/4"	2½"	1¼"	6.6
1¾"	21	1¾"	2½"	± 1/16"	3½"	± 1/4"	2½"	1½"	8.9
1½"	26	1½"	2¼"	± 1/16"	4½"	± 1/4"	3¼"	1½"	12
1½"	30	1½"	2½"	± 1/16"	4½"	± 1/4"	3½"	1½"	16.2
1½"	35	1½"	2½"	± 1/16"	5"	± 1/4"	4"	1¾"	21
1¾"	40	1¾"	2½"	± 1/16"	5¼"	± 1/4"	4½"	2"	25
2"	52	2"	3¼"	± 1/16"	6¼"	± 1/2"	5½"	2¼"	36
2¼"	67	2¼"	3½"	± 1/16"	7½"	± 1/2"	5¼"	2½"	60
2½"	82	2½"	4¼"	± 1/16"	8"	± 1/2"	6¼"	2¾"	74
2¾"	104	2¾"	4½"	± 1/16"	8¼"	± 3/4"	6½"	3"	90
3"	117	3"	5"	± 1/16"	9"	± 3/4"	6½"	3¼"	110
3½"	150	3½"	5¼"	± 1/16"	10½"	± 3/4"	8"	3¼"	200
4"	175	4"	6½"	± 1/16"	12"	± 3/4"	9"	4"	310

¹Design factor is 5 to 1

²Weights vary slightly with style of shackle pin used.

All Alloy No. 31 Railroad Car Hook

Designed for railroad salvage,
track clearing and yard maintenance.
Rounded eye allows wire rope to
be spliced directly to hook.

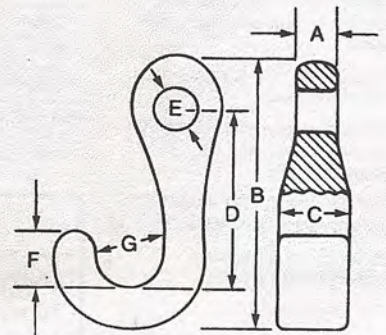

SWL ¹	A	B	C	D	E	F	G	Line Size	Weight
25 Ton	1½"	12¼"	3"	7¾"	11³/16"	2⁹/16"	3½"	1½"	23½ lbs.