

ROUNDUP® ROUNDSLINGS PATENTED*

The LIFTEX Roundup® Roundsling is a major advancement in securing almost any object to be pulled or lifted. It is constructed from 100% polyester fiber in an endless or continuous loop. It has super strength and offers long life. Roundup is lightweight, easy to handle, store and clean. It offers excellent resistance to ultra-violet rays and is resistant to many acids (but not alkalis). The LIFTEX Roundup Roundsling has a maximum working temperature of 200°F (100°C). Elongation approx. 3% at rated capacity.

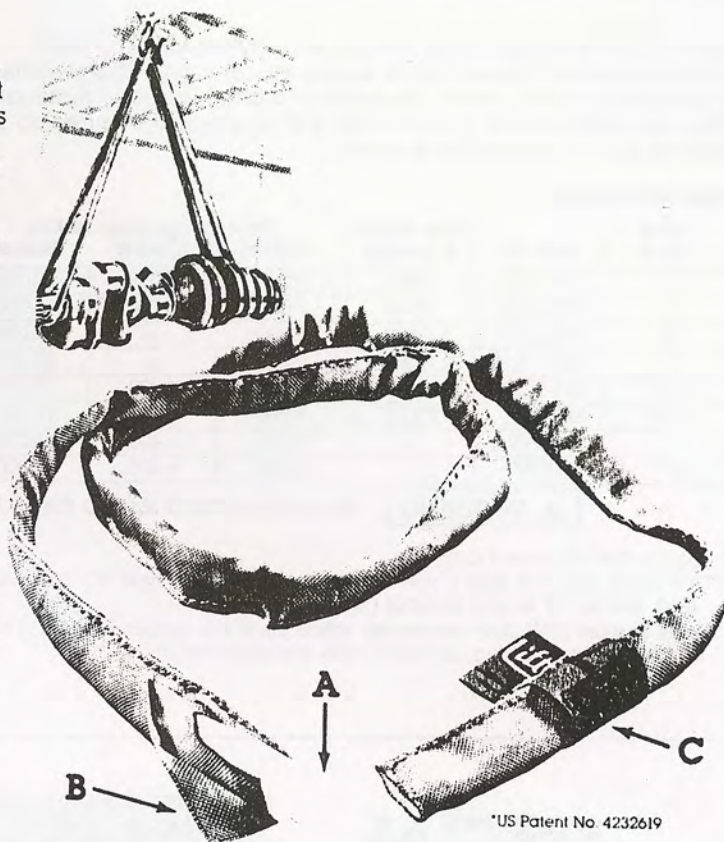
Cutaway "A" shows Roundup to be constructed of a continuous, or endless loop of 100% polyester fiber.

The accumulation of numerous fiber strands determines the strength, as the capacity chart below shows.






The multiple fiber construction makes the Roundup roundsling soft and flexible - perfect for a choker hitch. The sling contours itself around the load.

The bundle of fibers is protected by a double cover of polyester fabric, as shown at "B" in cutaway. Because the load bearing fibers never come in contact with the load, there is no wear to them as long as the cover remains intact. In addition, the endless roundsling can be constantly rotated, further extending the wear life of the protective covering and the sling.

Each Roundup has a branded leather tag attached with the rated* capacities marked, as shown at "C".



*RATED CAPACITIES

Part No.	†Color	Approx. Dia.	Approx. Weight/Foot (per 2 ft. circumferential length)	Vertical	Choke	Vert. Basket	30° Basket	45° Basket
								
		inch	lbs./ft.	lbs.	lbs.	lbs.	lbs.	lbs.
LR1	Purple	0.60	0.30	2600	2080	5200	4500	3600
LR2	Green	0.80	0.40	5300	4240	10600	9100	7400
LR3	Yellow	1.00	0.50	8400	6720	16800	14500	11800
LR5	Red	1.30	0.80	13200	10560	26400	22800	18600
LR7	Blue	1.55	1.20	21200	16960	42400	36700	29900
LR8	Orange	1.75	1.50	25000	20000	50000	43300	35300
LR9	Orange	1.95	2.00	31000	24800	62000	53600	43800
LR10	Orange	2.35	2.80	40000	32000	80000	69200	56500
LR11	Orange	3.15	3.60	52900	42320	105800	91600	74800
LR12	Orange	3.95	4.60	66100	52880	132200	114400	93400
LR13	Orange	4.80	5.80	90000	72000	180000	155800	127000

† All slings available in orange color on request.

***DO NOT EXCEED RATED CAPACITY**