


Size (A)	Work Load Limit in Tons	Bolt Diameter in Inches (B)	Approx. Weight Each in Pounds	Chain Shackle Bolt Type / Galvanized		
				C	D	E
1/2"	2	5/8	.91	1.69	.81	1.25
5/8"	3.1/4	3/4	1.72	2.09	1.09	1.53
3/4"	4.3/4	7/8	2.7	2.44	1.28	1.81
7/8"	6.1/2	1	3.94	2.94	1.47	2.13
1"	8.1/2	1.1/8	5.75	3.25	1.69	2.38
1.1/8	9.1/2	1.1/4	8.0	3.56	1.84	2.69
1.1/4"	12	1.3/8	10.5	3.94	2.00	2.94
1.3/8"	13.1/2	1.1/2	13.1	4.50	2.25	3.34
1.1/2"	17	1.5/8	18.3	5.00	2.31	3.63
1.3/4"	25	2	29.3	6.00	2.88	4.13
2"	35	2.1/4	44.3	7.00	3.25	4.75
2.1/2"	55	2.3/4	94	8.50	4.25	5.75
3"	85	3.1/4	160	9.44	4.88	6.38
3.1/2"	120	3.3/4	250	5.50	5.50	7.75

Chain Shackles Bolt Type


Galvanized

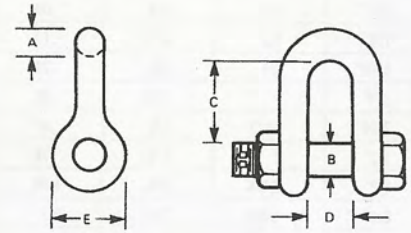

Size A (inches)	Anchor Shackle/ Stainless Steel 316, Screw Pin						
	Breaking Load	Weight		B (mm)	H (mm)	D (mm)	L1 (mm)
		Body (kgs)	Pin (kgs)				
5/32"	750	0.009	0.003	8	14	8	16
3/16"	1,300	0.014	0.004	10	17	10	20
1/4"	1,800	0.022	0.006	12	21	12	24
5/16"	3,500	0.048	0.016	16	28	16	32
13/32"	5,400	0.120	0.030	20	34	20	40
15/32"	7,200	0.168	0.055	24	42	24	48
1/2"	11,200	0.228	0.070	26	45	26	52
9/16"	12,000	0.305	0.105	28	50	28	56
5/8"	13,500	0.420	0.130	32	56	32	64
3/4"	18,200	0.756	0.210	38	66	38	76
7/8"	21,000	1.125	0.330	44	77	44	88
1"	24,000	1.620	0.490	50	87	50	100

Shackles




Stainless Steel Type 316 Forged

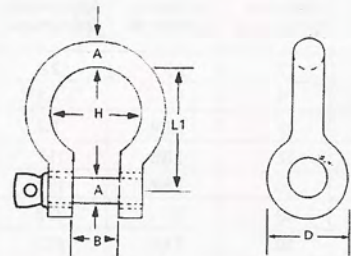

Size	Approx. Weight Per/Set Kgs.	Wire Rope Clips / Stainless Steel Type 316						
		A (mm)	B1 (mm)	B2 (mm)	D (mm)	H1 (mm)	H2 (mm)	I (mm)
2	.01	10	4	14	M3	18	11	14
3	.017	12	5	16	M4	24	12	17
4	.02	13	6	18	M4	24	14	19
5	.035	15	7	20	M6	33	16	24
6	.04	15	8	22	M6	33	18	28
8	.08	20	10	28	M8	40	21	34
10	.14	28	12	35	M10	50	24	45
12	.22	35	14	39	M12	60	28	51
14	.27	40	16	45	M12	65	33	53
16	.38	45	18	48	M14	75	38	60
19	.44	50	20	53	M14	80	40	62
22	.80	60	26	62	M18	100	47	78

Wire Rope Clips


Stainless Steel Type 316

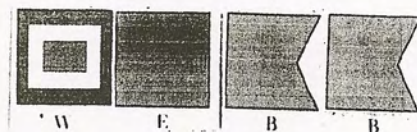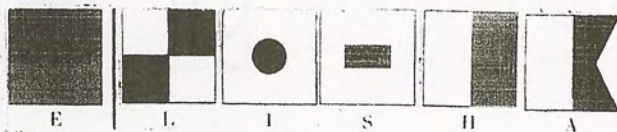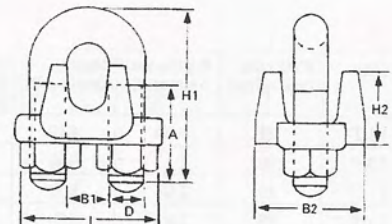

Size (A)	Work Load Limit in Tons	Bolt Diameter in Inches (B)	Approx. Weight Each in Pounds	Chain Shackle Bolt Type / Galvanized		
				C	D	E
1/2"	2	5/8	.91	1.69	.81	1.25
5/8"	3.1/4	3/4	1.72	2.09	1.09	1.53
3/4"	4.3/4	7/8	2.7	2.44	1.28	1.81
7/8"	6.1/2	1	3.94	2.94	1.47	2.13
1"	8.1/2	1.1/8	5.75	3.25	1.69	2.38
1.1/8	9.1/2	1.1/4	8.0	3.56	1.84	2.69
1.1/4"	12	1.3/8	10.5	3.94	2.00	2.94
1.3/8"	13.1/2	1.1/2	13.1	4.50	2.25	3.34
1.1/2"	17	1.5/8	18.3	5.00	2.31	3.63
1.3/4"	25	2	29.3	6.00	2.88	4.13
2"	35	2.1/4	44.3	7.00	3.25	4.75
2.1/2"	55	2.3/4	94	8.50	4.25	5.75
3"	85	3.1/4	160	9.44	4.88	6.38
3.1/2"	120	3.3/4	250	5.50	5.50	7.75

Chain Shackles Bolt Type


Galvanized

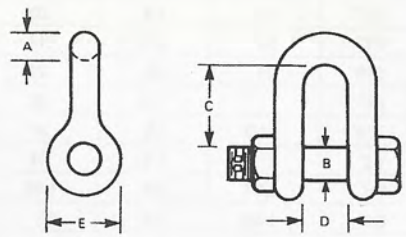

Size A (inches)	Anchor Shackle/ Stainless Steel 316, Screw Pin						
	Breaking Load	Weight		B (mm)	H (mm)	D (mm)	L1 (mm)
		Body (kgs)	Pin (kgs)				
5/32"	750	0.009	0.003	8	14	8	16
3/16"	1,300	0.014	0.004	10	17	10	20
1/4"	1,800	0.022	0.006	12	21	12	24
5/16"	3,500	0.048	0.016	16	28	16	32
13/32"	5,400	0.120	0.030	20	34	20	40
15/32"	7,200	0.168	0.055	24	42	24	48
1/2"	11,200	0.228	0.070	26	45	26	52
9/16"	12,000	0.305	0.105	28	50	28	56
5/8"	13,500	0.420	0.130	32	56	32	64
3/4"	18,200	0.756	0.210	38	66	38	76
7/8"	21,000	1.125	0.330	44	77	44	88
1"	24,000	1.620	0.490	50	87	50	100

Shackles

Stainless Steel Type 316 Forged



Size	Approx. Weight Per/Set Kgs.	Wire Rope Clips / Stainless Steel Type 316						
		A (mm)	B1 (mm)	B2 (mm)	D (mm)	H1 (mm)	H2 (mm)	I (mm)
2	.01	10	4	14	M3	18	11	14
3	.017	12	5	16	M4	24	12	17
4	.02	13	6	18	M4	24	14	19
5	.035	15	7	20	M6	33	16	24
6	.04	15	8	22	M6	33	18	28
8	.08	20	10	28	M8	40	21	34
10	.14	28	12	35	M10	50	24	45
12	.22	35	14	39	M12	60	28	51
14	.27	40	16	45	M12	65	33	53
16	.38	45	18	48	M14	75	38	60
19	.44	50	20	53	M14	80	40	62
22	.80	60	26	62	M18	100	47	78

Wire Rope Clips

Stainless Steel Type 316

